


## wwweavengrassecom



## **MULTI TXT**

hdhfi is milite Anial Di berni denti ili bi di kana na Ania Ali Ali Ali Ania Mala Mala Mala Mala Mala Mala medi

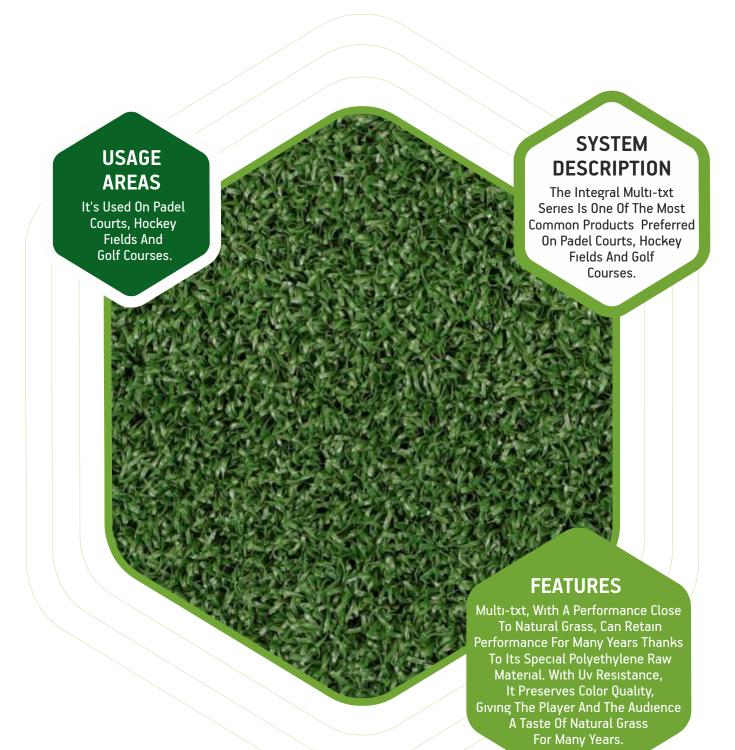



TECHNICAL INFORMATION			
Synthetic Grass	11MM-12MM-13MM-15MM MULTI TXT		
Base Cloth	165 GR PP BASE CLOTH		
Backing	1.035 - 1.100 GR LATEX		
Yarn	6.800-7.000 DTEX	%100 PE Monofilament	
Knot Number	58.650-63.750 PCS		
Yarn Weight	1.384 GR - 1.741 GR		
Total Weight	2.503 GR - 2.919 GR		
Helmetin Cloth	450 Gr Tarpaulın		
Adhesive	21 + 4 Kg Two-component Polyurethane Adhesive		
Sılıca Sand	0.2 - 1.0 Mm Dried And Kiln-dried Round Silica Sand (10-14 Kg)		

IMPLEMENTATION METHOD		
Infrustructure	Concrete Or Asphalt Floor Must Be Preferred. It Should Have Two-sided Or Single-sided Surface Slope.	
Synthetic Grass	Grass Carpet Rolls That Meet The Project's Requirements Are Opened Side By Side And Matched By Cutting The Joints.	
Game Line	Game Lines Are Placed On The Grass Field By Cutting The Original White-yellow Grass Carpets 8-12 Cm Width.	
Helmetin Cloth	Helmetin Cloth Is Used To Combine Pieces Of Grass Carpet.	
Adhesive	Well-mixed Two Component Adhesive Is Applied To The Helmetin Cloth, Placing It Between Two Pieces Of Grass Carpet And Making Sure That The Grass Carpet Edge Meets Well With The Adhesive.	

COLORS		
Grass Carpet	Green, Blue	
Grass Carpet Line	White	
Out Of Line	Green, Blue	

KEY BENEFITS		
Grass Carpet	Appearance Close To Natural Grass, High Performance, Ideal For Countries With Cold And Hot Climate.	
Sılıca Sand	It Has The Ability To Drain 100% Of The Water, Making Grass Carpet Fibers Stand Upright.	
Ball Bouncing	Padel, Hockey And Golf Can Be Played, Allowing The Ball To Bounce, Thanks To The Sand Fill Inside.	





PACKAGING TYPES		
Grass Carpet	It Is Wrapped As Roll Of 4 Meters Width.	
Helmetin Cloth	It Is Wrapped As Roll.	
Adhesive	Buckets Of 21+4 Kg.	
Sılıca Sand	Sacks Of 50 Kg / 1000 Kg.	
Other	In Various Ways, Its Palette Is Sacks And Free Goods.	

STORAGE CONDITIONS		
Glue And Its Derivatives In Unopened Packagings, It Can Be Stored For 12 Months From +5 To +30 Degrees.		
Other Materials	In Unopened Packagings, It Can Be Stored For 24 Months From +0 To +40 Degrees.	

MANUFACTURING AND INSTALLATION TIME			
Grass Carpet	Manufacturing: 10 Days	Installation: 2-7 Days	Cannot Be Applied Simultaneously
Sılıca Sand	Manufacturing: 10 Days	Installation: 1-5 Days	Cannot Be Applied Simultaneously

WARRANTY		
Grass Carpet Uv Warranty	3-5 YEARS	5% Tolerance
Grass Carpet Yarn Breaking	3-5 YEARS	10% Tolerance
Sılıca Sand	3-5 YEARS	15% Tolerance
Application Warranty	2 YEARS	In Case Of Maintenance Agreement (5 Years)

## **MULTI TXT**







+90 212 678 13 13 Image: +90 212 678 13 13 Image: optimized opt